



TECHNICAL DATA

MASSES

Operating mass (incl. ROPS)	5580 kg
Operating mass (incl. Cab)	5850 kg
Mass with max. ballast	12100 kg

COMPACTION

Rolling width	2090 mm
Tyre overlap	50 mm
Wheel loads, without ballast	620 kg
Wheel loads, with max. ballast	1340 kg
Tyre pressure, min	240 kPa
Tyre pressure, max	630 kPa
Tyre type (smooth)	10.5-80 14 ply
Water spray system, type	Pressurized
Water spray system, tank capacity	410 l
Number of tyres	9 tyres
Wheel oscillation (°)	±3

TRACTION

Transmission	Hydrostatic, direct drive motors at rear tyres
Speed low	9 km/h
Speed high	18 km/h
Max. theoretical gradeability	28 %
Speed range	0 -18 km/h

ENGINE

Manufacturer/Model	Kubota V3307 (STG V)
Rated power, SAE J1995	55 kW (74 hp) @ 2.200 rpm
Type	Water cooled turbo Diesel
Fuel tank capacity	215 l
Electrical system	12 V

ENGINE



Manufacturer/Model	Kubota V3307 (Stage IIIA/Tier 3)
Rated power, SAE J1995	55 kW (74 hp) @ 2.200 rpm
Type	Water cooled turbo Diesel

HYDRAULIC SYSTEM

Service brake	Hydrost. braking on drive wheels (rear)
Parking/ Emergency brake	Spring -applied on drive wheels (rear)

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.

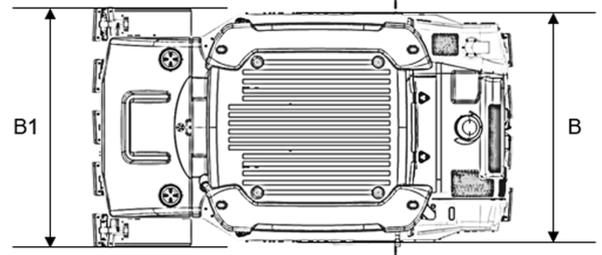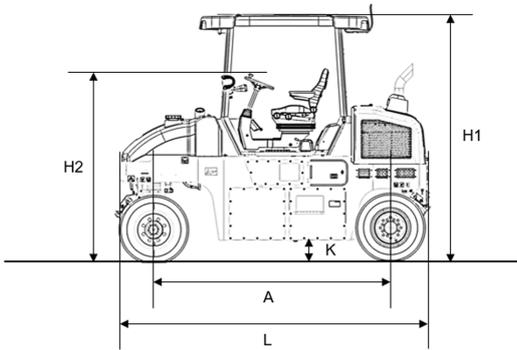

DIMENSIONS

DIMENSIONS

A. Wheelbase	2.760 mm
B. Width	2.057 mm
B1. Width	2.090 mm
H1. Height, with ROPS/cab	2.935 mm
H2. Height, w/o ROPS/cab	2.210 mm
K. Ground clearance	268 mm
L. Length	3.690 mm
R. Turning radius, outside	7.090 mm

STANDARD EQUIPMENT

- Arm rest, Backup alarm
- Battery switch
- Documentation (Manuals -one set)
- Emergency stop
- Fuel level display
- Horn, Hour meter
- Hydraulic check points
- Hydraulic oil lever indicator
- Interloc system
- Key master and start
- Lifting and tiedown eyes
- Mirrors (process view)
- Neutral start arrangement
- Parking brake
- Pressurized sprinkler system
- Seat with suspension
- Sliding and swiveling operator unit
- Sprinkler system, Sprinkler timer
- Single scrapers
- Speedometer, Tachometer display
- Towing eyelet (rear)
- Warning – Air cleaner
- Warning – Brake, Warning – Clogged hydraulic oil filter
- Warning – Engine temperature
- Warning – Engine oil pressure
- Warning – Hydraulic fluid temperature
- Warning – Low charge, Warning – Low fuel level
- Working lights LED (front/rear)

OPTIONAL EQUIPMENT

- Flexible ballast option: 8 steel ballast (3.500 kg/front) or 12 steel ballast (5.300 kg/front & rear)
- Asphalt temperature meter
- Biologically degradable hydraulic oil
- Canopy or ROPS/FOPS or Cab incl. ACC
- Driving lights (RH or LH)
- Dyn@link, Dyn@link advanced
- Emulsion tank, Fire extinguisher
- First aid box, Heat covers for wheels
- Radio & MP3 player (Cab)
- Rotating beacon (LED)
- Rotating beacon (Ignition Control/LED)
- Seat belts 3" (ROPS or Cab)
- Seat luxury (ROPS or Cab)
- Cocoa mats, Slow Moving Vehicle sign
- Spare tire, Sprinkler pump (back up)
- Tool set, Towing eyelet (front)
- Vandal cover (Canopy or ROPS/FOPS)
- Water tank lockable, Working lights (night LED)

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.